

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
20 June 2002 (20.06.2002)

(10) International Publication Number  
**WO 02/47619 A2**

PCT

(51) International Patent Classification<sup>7</sup>: **A61K 7/00**

(21) International Application Number: **PCT/IB01/02786**

(22) International Filing Date:  
11 December 2001 (11.12.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
00/16161 12 December 2000 (12.12.2000) FR  
PCT/IB/00/02002  
21 December 2000 (21.12.2000) IB

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(71) Applicant (*for all designated States except US*):  
**L'OREAL S.A.** [FR/FR]; 14, Royale Street, F-75008 Paris (FR).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **COLLIN, Nathalie** [FR/FR]; 1, Michel Voisin Street, F-92330 Sceaux (FR).

(74) Agent: **KROMER, Christophe**; L'Oréal - D.P.I., 6, Bertrand Sincholle Street, F-92585 Clichy Cedex (FR).



**WO 02/47619 A2**

(54) Title: **COSMETIC COMPOSITION COMPRISING A POLYMER AND FIBRES**

(57) Abstract: The invention relates to a composition comprising, in a physiologically acceptable medium containing a fatty phase, a polymer with a weight-average molecular mass of less than 100 000 and in particular ranging from 1000 to 30 000, comprising a) a polymer skeleton containing hydrocarbon-based repeating units containing at least one hetero atom, and optionally b) pendent fatty chains and/or terminal fatty chains, which may be functionalized, containing from 6 to 120 carbon atoms and being linked to these units, and fibres.

**BEST AVAILABLE COPY**

## Cosmetic composition comprising a polymer and fibres

The present invention relates to a composition comprising, in a physiologically acceptable medium, 5 fibres and a polymer containing a specific hetero atom, the composition being intended in particular for cosmetics. The invention also relates to a cosmetic make-up or care process for keratin materials. The make-up or care process and composition according to 10 the invention are intended more particularly for the keratin materials of human beings, such as the skin (including the scalp), the nails, keratin fibres, especially substantially longilinear keratin fibres, such as the eyelashes, the eyebrows and the hair. The 15 invention more especially relates to a mascara.

The composition according to the invention can be in the form of a coating composition for the eyelashes (in particular a mascara), an eyeliner, a product for the 20 eyebrows, a product for the lips, a face powder, an eyeshadow, a foundation, a make-up product for the body, a concealer product, a nail varnish, a skincare product, including a product for scalp care, or a haircare product (hair mascara or spray).

25

It is known practice to use fibres in make-up products, especially for their lengthening effects in mascaras

(see JP-A-57/158 714 and JP-A-3-153 613), their moisturizing properties in lipsticks (see document US-A-5 498 407), to improve the contours of lipstick on the edges of the lips (see document EP-A-0 106 762) or  
5 to improve the condition of broken nails (see FR-A-1 529 329) or in skincare products for their velvety feel (see JP-A-7/196 440). However, during the application of these compositions to keratin materials, the fibres have difficulty in adhering to the keratin  
10 materials. The user must thus apply the composition to the keratin materials several times in order to deposit a sufficient amount of fibres to obtain the desired cosmetic properties, which thus requires a certain amount of time to be devoted to applying the make-up  
15 and obtaining the desired make-up results. However, users who are in a hurry may find this time too long. There is thus a need to have available a composition containing fibres which allows the expected make-up result to be obtained quickly and easily.

20

Moreover, the fibres which do not adhere to the keratin materials thus have a tendency to become detached from their support and then become removed over time. The removal of these fibres thus causes a perceptible  
25 reduction in the desired cosmetic properties provided by the fibres, making it necessary to reapply the product. Furthermore, for a mascara, as the fibres

become detached from the eyelashes, they may end up in the eyes and cause discomfort.

The aim of the present invention is to provide a  
5 cosmetic composition for overcoming the drawbacks mentioned above, comprising fibres which adhere well to keratin materials.

The Applicant has now found, surprisingly, that the use  
10 of a polymer containing a specific hetero atom in a composition comprising fibres gives a composition which is easy to apply to the keratin materials and allows the fibres to be deposited quickly on the keratin materials. The composition applied to the keratin  
15 materials allows fast and adhesive holding of the fibres on the keratin materials. The composition thus gives a deposit of the composition adhering to the keratin materials.

20 Furthermore, when the composition is a mascara, a make-up which quickly thickens the keratin fibres, in particular the eyelashes, is obtained. Instantaneous loading of the eyelashes is thus observed when the composition is applied thereto. The composition also  
25 gives good lengthening of the eyelashes.

More specifically, a subject of the invention is a composition comprising, in a physiologically acceptable medium containing a fatty phase, at least one first polymer with a weight-average molecular mass of less  
5 than 100 000, comprising a) a polymer skeleton containing hydrocarbon-based repeating units containing at least one hetero atom, and optionally b) at least one pendent fatty chain and/or at least one terminal fatty chain, which may be functionalized, containing  
10 from 6 to 120 carbon atoms and being linked to these hydrocarbon-based units, and at least one or more fibres.

A subject of the invention is also a cosmetic process  
15 for making up or caring for the keratin materials of human beings, comprising the application of a composition as defined above to the keratin materials.

A subject of the invention is also the use of a  
20 composition as defined above to obtain a deposit which adheres to keratin materials.

Another subject of the invention is the use of a mascara comprising a composition as defined above to  
25 thicken and/or lengthen the eyelashes.

A subject of the invention is also the use of a combination of at least one first polymer with a weight-average molecular mass of less than 100 000, comprising a) a polymer skeleton containing  
5 hydrocarbon-based repeating units containing at least one hetero atom, and b) optionally at least one pendent fatty chain and/or at least one terminal fatty chain, which may be functionalized, containing from 6 to 120 carbon atoms and being linked to these hydrocarbon-  
10 based units, and at least one fibre, in a physiologically acceptable composition, to obtain a deposit which adheres to keratin materials.

The expression "physiologically acceptable medium"  
15 means a medium which is non-toxic and which can be applied to the skin, superficial body growths or the lips of human beings, such as a cosmetic medium.

For the purposes of the invention, the expression  
20 "functionalized chain" means an alkyl chain comprising one or more functional or reactive groups chosen in particular from amide, hydroxyl, ether, oxyalkylene, polyoxyalkylene and halogen groups, including fluoro or perfluoro groups, ester, siloxane and polysiloxane  
25 groups. In addition, the hydrogen atoms of one or more fatty chains may be substituted at least partially with fluorine atoms.

According to the invention, these chains may be linked directly to the polymer skeleton or via an ester function or a perfluoro group.

5

For the purposes of the invention, the term "polymer" means a compound containing at least 2 repeating units and preferably at least 3 repeating units, which are identical.

10

For the purposes of the invention, the expression "hydrocarbon-based repeating units" means a unit containing from 2 to 80 carbon atoms and preferably from 2 to 60 carbon atoms, bearing hydrogen atoms and optionally oxygen atoms, which may be linear, branched or cyclic, and saturated or unsaturated. These units each also comprise one or more hetero atoms that are advantageously non-pendent but are in the polymer skeleton. These hetero atoms are chosen from nitrogen, sulphur and phosphorus atoms and combinations thereof, optionally combined with one or more oxygen atoms. The units preferably comprise at least one nitrogen atom, in particular a non-pendent nitrogen atom. These units also advantageously comprise a carbonyl group.

25

The units containing a hetero atom are, in particular, amide units forming a skeleton of the polyamide type,

carbamate and/or urea units forming a polyurethane, polyurea and/or polyurea-urethane skeleton. These units are preferably amide units. The pendent chains are advantageously linked directly to at least one of the  
5 hetero atoms of the polymer skeleton. In one embodiment, the first polymer comprises a polyamide skeleton.

Between the hydrocarbon-based units, the first polymer  
10 may comprise silicone units or oxyalkylene units.

In addition, the first polymer in the composition of the invention advantageously comprises a number of fatty chains which represents from 40% to 98% of the  
15 total number of units containing a hetero atom and of fatty chains, and better still from 50% to 95%. The nature and proportion of the units containing a hetero atom depends on the nature of the fatty phase and is, in particular, similar to the polar nature of the fatty  
20 phase. Thus, the more the units containing a hetero atom are polar and in high proportion in the first polymer, which corresponds to the presence of several hetero atoms, the greater the affinity of the first polymer for polar oils. On the other hand, the less  
25 polar or even apolar the units containing a hetero atom or the lower their proportion, the greater the affinity of the first polymer for apolar oils.



The first polymer is advantageously a polyamide. Thus, a subject of the invention is also a composition comprising, in a physiologically acceptable medium  
5 comprising a fatty phase, at least one first polyamide polymer with a weight-average molecular mass of less than 100 000, comprising a) a polymer skeleton containing amide repeating units, and b) optionally at least one pendent fatty chain and/or at least one  
10 terminal chain, which may be functionalized, containing from 6 to 120 carbon atoms and being linked to these amide units, and at least one fibre.

The pendent fatty chains are preferably linked to at least one of the nitrogen atoms of the amide units of  
15 the first polymer.

In particular, the fatty chains of this polyamide represent from 40% to 98% of the total number of amide units and of fatty chains, and better still from 50% to  
20 95%.

Advantageously, the first polymer, and in particular the polyamide, of the composition according to the invention has a weight-average molecular mass of less  
25 than 100 000 (especially ranging from 1 000 to 100 000), in particular less than 50 000 (especially ranging from 1 000 to 50 000) and more particularly

ranging from 1 000 to 30 000, preferably from 2 000 to 20 000 and better still from 2 000 to 10 000.

The first polymer, and in particular the polyamide, is non soluble in water, in particular at 25 °C. In another embodiment, the first polymer has non ionic group.

As preferred first polymers which may be used in the invention, mention may be made of polyamides branched with pendent fatty chains and/or terminal fatty chains containing from 6 to 120 carbon atoms and better still from 8 to 120 and in particular from 12 to 68 carbon atoms, each terminal fatty chain being linked to the polyamide skeleton via at least one bonding group, in particular an ester. These polymers preferably comprise a fatty chain at each end of the polymer skeleton and in particular of the polyamide skeleton. Other bonding groups which may be mentioned are ether, amine, urea, urethane, thioether, thioester, thiourea and thiourethane groups.


These first polymers are preferably polymers resulting from a polycondensation between a dicarboxylic acid containing at least 32 carbon atoms (in particular containing from 32 to 44 carbon atoms) and at least one amine, chosen from diamines comprising at least 2

carbon atoms, (in particular from 2 to 36 carbon atoms). The diacid is preferably a dimer of a fatty acid containing ethylenic unsaturation containing at least 16 carbon atoms, preferably from 16 to 24 carbon atoms, for instance oleic acid, linoleic acid or linolenic acid. The amine can, for example, be chosen from diamine, such as ethylenediamine, hexylenediamine, hexamethylenediamine and phenylenediamine and from triamines, such as ethylenediamine. For the polymers comprising one or 2 terminal carboxylic acid groups, it is advantageous to esterify them with a monoalcohol containing at least 4 carbon atoms, preferably from 10 to 36 carbon atoms, better still from 12 to 24 and even better from 16 to 24, for example 18 carbon atoms.

15

These polymers are more especially those disclosed in document US-A-5 783 657 from the company Union Camp. Each of these polymers in particular satisfies formula (I) below:

20

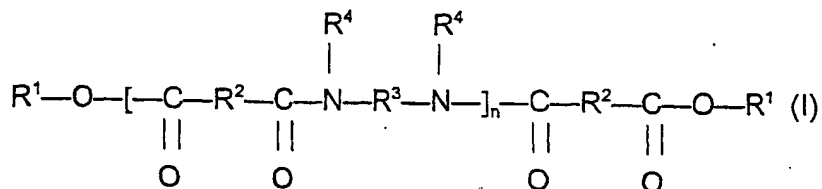

25

in which n denotes a number of amide units such that the number of ester groups represents from 10% to 50% of the total number of ester and amide groups; R<sup>1</sup> is, independently in each case, an alkyl or alkenyl group

containing at least 4 carbon atoms and in particular from 4 to 24 carbon atoms;  $R^2$  represents, independently in each case, a  $C_4$  to  $C_{42}$  hydrocarbon-based group, on condition that 50% of the groups  $R^2$  represent a  $C_{30}$  to  $C_{42}$  hydrocarbon-based group;  $R^3$  represents, independently in each case, an organic group containing at least 2 carbon atoms, hydrogen atoms and optionally one or more oxygen or nitrogen atoms; and  $R^4$  represents, independently in each case, a hydrogen atom, a  $C_1$  to  $C_{10}$  alkyl group or a direct bond to  $R^3$  or to another  $R^4$ , such that the nitrogen atom to which  $R^3$  and  $R^4$  are both attached forms part of a heterocyclic structure defined by  $R^4-N-R^3$ , with at least 50% of the groups  $R^4$  representing a hydrogen atom.

15

In the particular case of formula (I), the terminal fatty chains that are optionally functionalized for the purposes of the invention are terminal chains linked to the last hetero atom, in this case nitrogen, of the polyamide skeleton.

In particular, the ester groups of formula (I), which form part of the terminal and/or pendent fatty chains for the purposes of the invention, represent from 15% to 40% of the total number of ester and amide groups and better still from 20% to 35%. Furthermore,  $n$  is advantageously an integer ranging from 1 to 5 and better still greater than 2, i.e. from 3 to 5.

Preferably,  $R^1$  is a  $C_{12}$  to  $C_{22}$  and preferably  $C_{16}$  to  $C_{22}$  alkyl group. Advantageously,  $R^2$  can be a  $C_{10}$  to  $C_{42}$  hydrocarbon-based (alkylene) group. Preferably, at least 50% and better still at least 75% of the groups  $R^2$  are groups containing from 30 to 42 carbon atoms. The other groups  $R^2$  are  $C_4$  to  $C_{18}$  and better still  $C_4$  to  $C_{12}$  hydrogen-containing groups. Preferably,  $R^3$  represents a  $C_2$  to  $C_{36}$  hydrocarbon-based group or a polyoxyalkylene group and  $R^4$  represents a hydrogen atom. Preferably,  $R^3$  represents a  $C_2$  to  $C_{12}$  hydrocarbon-based group.

The hydrocarbon-based groups may be linear, cyclic or branched, and saturated or unsaturated groups. Moreover, the alkyl and alkylene groups may be linear or branched, and saturated or unsaturated groups.

In general, the polymers of formula (I) are in the form of mixtures of polymers, these mixtures also possibly containing a synthetic product corresponding to a compound of formula (I) in which  $n$  is 0, i.e. a diester.

As examples of first polymers according to the invention, mention may be made of the commercial products sold by the company Arizona Chemical under the names Uniclear® 80 and Uniclear® 100. They are sold, respectively, in the form of an 80% (in terms of active material) gel in a mineral oil and a 100% (in terms of

active material) gel. They have a softening point of from 88 to 94°C. These commercial products are a mixture of copolymers of a C<sub>36</sub> diacid condensed with ethylenediamine, having a weight-average molecular mass of about 6 000. The terminal ester groups result from the esterification of the remaining acid endings with cetyl alcohol, stearyl alcohol or mixtures thereof (also known as cetylstearyl alcohol).

As first polymers which can be used in the invention, mention may also be made of polyamide resins resulting from the condensation of an aliphatic dicarboxylic acid and a diamine (including compounds containing more than 2 carbonyl groups and 2 amine groups), the carbonyl and amine groups of adjacent individual units being condensed via an amide bond. These polyamide resins are, in particular, those sold under the brand name Versamid® by the companies General Mills Inc. and Henkel Corp. (Versamid®930, 744 or 1655) or by the company Olin Mathieson Chemical Corp. under the brand name Onamid®, in particular Onamid® S or C. These resins have a weight-average molecular mass ranging from 6 000 to 9 000. For further information regarding these polyamides, reference may be made to the documents US-A-3 645 705 and US-A-3 148 125. More especially, Versamid® 930 or 744 is used.

The polyamides sold by the company Arizona Chemical under the references Uni-Rez® (2658, 2931, 2970, 2621, 2613, 2624, 2665, 1554, 2623 and 2662) and the product sold under the reference Macromelt 6212 by the company  
5 Henkel may also be used. For further information regarding these polyamides, reference may be made to document US-A-5 500 209.

It is also possible to use polyamide resins obtained  
10 from plants, such as those disclosed in patents US-A-5 783 657 and US-A-5 998 570, the disclosures of which are herein incorporated by reference.

The first polymer present in the composition according  
15 to the invention advantageously has a softening point of greater than 65°C, which may be up to 190°C. It preferably has a softening point ranging from 70°C to 130°C and better still from 80°C to 105°C. The first polymer is in particular a non-waxy polymer.

20

The first polymer according to the invention preferably corresponds to the formula (I) mentioned above. On account of its fatty chain(s), this first polymer is readily soluble in oils and thus leads to compositions  
25 that are macroscopically homogeneous even with a high content (at least 25%) of polymer, unlike polymers not containing a fatty chain.

The first polymer may be present in the composition according to the invention in a content ranging from 0.01% to 10% by weight, relative to the total weight of  
5 the composition, preferably ranging from 0.05% to 5% by weight and better still ranging from 0.1% to 3% by weight.

According to the invention, the composition contains  
10 one or more fibres. The term "fibre" means any particle that is solid at room temperature and atmospheric pressure, whose length is greater than its apparent diameter, used alone or in combination, and which is insoluble in the ingredients of the composition, even  
15 when these ingredients are raised to a temperature above room temperature and in particular to their softening point or their melting point. These fibres are advantageously chemically inert, i.e. they do not react chemically with the various ingredients of the  
20 composition.

These fibres have melting points that are at least greater than 170°C and better still greater than 200°C. They may be absorbent or non-absorbent, i.e. capable in  
25 particular of absorbing the oils of the composition and also the biological substances secreted by the skin.



The fibres which can be used in the composition of the invention may be fibres of synthetic or natural, and inorganic or organic origin. They may be short or long, flat, cylindrical or lamellar, individual or organized, 5 for example in bundles, and hollow or solid. They can have any shape, and in particular a circular, elliptic or polygonal (triangular, square, hexagonal or octagonal) cross section depending on the specific application envisaged. In particular they can have 10 blunt and/or rounded ends to prevent injury.

Their ends may also be multilobal, in particular trilobal, pointed or rounded.

15 In particular, the fibres have a length ranging from 1 nm to 20 mm, preferably from 10 nm to 5 mm and better still from 0.1 mm to 1.6 mm. Their cross section can be within a circle of diameter D ranging from 2 nm to 150  $\mu$ m, preferably ranging from 20 nm to 120  $\mu$ m and 20 better still from 500 nm to 80  $\mu$ m. The weight or yarn count of the fibres is often given in denier or decitex and represents the weight in grams per 9 km of yarn. The fibres in the composition according to the invention preferably have a yarn count chosen in the 25 range from 0.15 to 30 denier and better still from 0.18 to 18 denier.

Advantageously, the fibres have a length L and a

diameter D such that L/D is chosen in the range from 1.5 to 2 500, preferably from 3.5 to 500 and better still from 5 to 150.

5 The fibres can be those used in the manufacture of textiles, and in particular silk, cotton, wool or flax fibres, cellulose fibres extracted in particular from wood, plants or algae, polyamide (Nylon®), cork, sugar can, rayon or viscose fibres, acetate fibres, in  
10 particular rayon acetate or cellulose acetate fibres, poly-(p-phenylene terephthalamide) (or aramide) fibres, in particular Kevlar® fibres, acrylic polymer fibres, in particular polymethyl methacrylate (PMMA) or poly-2-hydroxyethyl methacrylate fibres, polyolefin  
15 fibres and in particular polyethylene or polypropylene fibres, glass, silica or carbon fibres, in particular in graphite form, polytetrafluoroethylene (Teflon®), insoluble collagen, polyester, polyvinyl chloride or polyvinylidene chloride, polyvinyl alcohol,  
20 polyacrylonitrile, chitosan, polyurethane or polyethylene phthalate fibres, fibres formed from a mixture of polymers such as those mentioned above, for instance polyamide/polyester fibres, and mixtures thereof.

25

It is also possible to use surgical fibres, such as resorbable synthetic fibres prepared from glycolic acid

and from  $\epsilon$ -caprolactone ("Monocryl" from Johnson & Johnson), resorbable synthetic fibres such as the copolymer of lactic acid and of glycolic acid ("Vicryl" from Johnson & Johnson), terephthalic polyester fibres  
5 ("Ethibond" from Johnson & Johnson) and stainless steel threads ("Steel" from Johnson & Johnson) in particular for use as nail varnishes.

Moreover, the fibres may or may not be surface-treated  
10 and may or may not be coated, in particular with a view to making them hydrophobic. As coated fibres which can be used in the invention, mention may be made of polyamide fibres coated with copper sulphide for an antistatic effect (for example the R-STAT fibres from  
15 Rhodia) or another polymer allowing a particular organization of the fibres (specific surface treatment) or a surface treatment which induces colour/hologram effects ("Lurex" fibre from Sildorex, for example).

20 Flat multilayer fibres having goniochromatic properties may also be used. Such fibres are disclosed in particular in the document. Multilayer polymer fibres are disclosed in particular in document EP-A-0 921 217. They are formed from alternating layers of polyamide  
25 and polyester, in particular polyester terephthalate.

Fibres of synthetic origin and in particular organic

fibres such as those used in surgery are preferably used.

In one particular embodiment of the composition according to the invention, it is preferable for the fibre or mixture of fibres used in the composition to contain a chemical group of the same chemical nature as those of the units of the first polymer or a chemical group capable of forming physical bonds of the same type as that of the units of the first polymer (self-complementary hydrogen bonds,  $\pi$  interactions between unsaturated rings or charge-transfer interactions, dipolar interactions, coordination bonds with organometallic derivatives). Thus, for a first polymer containing units of the amide, urea and/or urethane type, the fibres used advantageously contain groups capable of forming hydrogen bonds, like this first polymer. As fibres capable of forming hydrogen bonds, mention may be made of fibres of acrylic polymer such as PMMA or poly(2-hydroxyethyl methacrylate), of poly-(p-phenylene terephthalamide), polyamide (Nylon®) fibres, polyurethane fibres and mixtures thereof. For units of the ester type, the fibres used may be of the polyester type.

25

The fibres which can be used in the composition according to the invention are preferably polyamide or

- poly-(p-phenylene terephthalamide) fibres for a first polymer with a polyamide unit. Their length (L) can range from 0.1 to 5 mm, preferably from 0.25 to 1.6 mm, and their average diameter (D) can range from 5 to 50  $\mu\text{m}$ . In particular, the polyamide fibres sold by Etablissements P. Bonte under the name Polyamide 0.9 Dtex 3 mm, having an average diameter ranging from 15  $\mu\text{m}$  to 20  $\mu\text{m}$ , a weight of about (0.9 dtex) and a length ranging from 0.3 mm to 1.5 mm, can be used.
- 10 Poly-(p-phenylene terephthalamide) fibres with an average diameter of 12  $\mu\text{m}$  and a length of about 1.5 mm can also be used, such as those sold under the name Kevlar Floc by the company Du Pont Fibres.
- 15 The fibres may be present in the composition according to the invention in a content ranging from 0.1% to 40% by weight, relative to the total weight of the composition, in particular ranging from 0.5% to 30% by weight, preferably ranging from 1% to 20% by weight and
- 20 better still from 1% to 10% by weight.

Advantageously, the first polymer and the fibres may be present in the composition according to the invention in a fibres/first polymer weight ratio which may range

25 from 0.5 to 4, preferably ranging from 0.9 to 2.5.

The fatty phase of the composition can comprise fatty substances chosen from oils, organic solvents, waxes and pasty fatty substances, and mixtures thereof. The fatty phase can form a continuous phase of the composition. In particular, the composition according to the invention may be anhydrous.

The fatty phase may especially consist of any oil which is physiologically acceptable and in particular cosmetically acceptable, chosen especially from oils of mineral, animal, plant or synthetic origin, carbon-based oils, hydrocarbon-based oils, fluoro oils and/or silicone oils, alone or as a mixture, provided that they form a homogeneous and stable mixture and provided that they are compatible with the intended use.

The total fatty phase of the composition can represent from 2% to 98% by weight, relative to the total weight of the composition, and preferably from 5% to 85% by weight.

The fatty phase of the composition can advantageously comprise at least one volatile oil or organic solvent and/or at least one non-volatile oil.

25

For the purposes of the invention, the expression "volatile oil or organic solvent" means any non-aqueous

medium which can evaporate on contact with the skin in less than one hour at room temperature and atmospheric pressure. The volatile organic solvent(s) and the volatile oils of the invention are volatile cosmetic  
5 organic solvents and oils, that are liquid at room temperature, having a non-zero vapour pressure at room temperature and atmospheric pressure, ranging in particular from  $10^{-3}$  to 300 mmHg (0.13 Pa to 40 000 Pa) and preferably greater than 0.3 mmHg (30 Pa). The  
10 expression "non-volatile oil" means an oil which remains on the skin at room temperature and atmospheric pressure for at least several hours and which in particular has a vapour pressure of less than  $10^{-2}$  mmHg (1.33 Pa).

15

These oils may be hydrocarbon-based oils, silicone oils or fluoro oils, or mixtures thereof.

The expression "hydrocarbon-based oil" means an oil  
20 mainly containing hydrogen and carbon atoms and optionally oxygen, nitrogen, sulphur or phosphorus atoms. The volatile hydrocarbon-based oils may be chosen from hydrocarbon-based oils containing from 8 to 16 carbon atoms, and especially  $C_8$ - $C_{16}$  branched alkanes,  
25 for instance  $C_8$ - $C_{16}$  isoalkanes of petroleum origin (also known as isoparaffins), for instance isododecane (also known as 2,2,4,4,6-pentamethylheptane), isodecane and

isohexadecane, and, for example, the oils sold under the trade names Isopars or Permetyls,  $C_8$ - $C_{16}$  branched esters, isohexyl neopentanoate, and mixtures thereof. Other volatile hydrocarbon-based oils, for instance  
5 petroleum distillates, especially those sold under the name Shell Solt by the company Shell, may also be used. The volatile solvent is preferably chosen from hydrocarbon-based volatile oils containing from 8 to 16 carbon atoms, and mixtures thereof.

10

Volatile oils which may also be used are volatile silicones such as, for example, linear or cyclic volatile silicone oils, especially those with a viscosity  $\leq 8$  centistokes ( $8 \times 10^{-6}$  m<sup>2</sup>/s) and especially  
15 containing from 2 to 7 silicon atoms, these silicones optionally comprising alkyl or alkoxy groups containing from 1 to 10 carbon atoms. As volatile silicone oils which may be used in the invention, mention may be made in particular of octamethylcyclotetrasiloxane,  
20 decamethylcyclopentasiloxane, dodecamethylcyclohexasiloxane, heptamethylhexyltrisiloxane, heptamethyloctyltrisiloxane, hexamethyldisiloxane, octamethyltrisiloxane, decamethyltetrasiloxane and dodecamethylpentasiloxane, and mixtures thereof.

25



Volatile fluoro solvents such as nonafluoromethoxybutane or perfluoromethylcyclopentane may also be used.

5 The volatile oil may be present in the composition according to the invention in a content ranging from 0% to 98% by weight (in particular from 0.1% to 98%), relative to the total weight of the composition, preferably from 0% to 65% by weight (in particular from  
10 1% to 65%).

The composition can also comprise at least one non-volatile oil chosen in particular from non-volatile hydrocarbon-based and/or silicone and/or fluoro oils.

15

Non-volatile hydrocarbon-based oils which may be mentioned in particular are:

- hydrocarbon-based plant oils such as triglycerides consisting of fatty acid esters and of glycerol in  
20 which the fatty acids may have varied chain lengths from  $C_4$  to  $C_{24}$ , these chains possibly being linear or branched, and saturated or unsaturated; these oils are, in particular, wheat germ oil, sunflower oil, grape seed oil, sesame oil, corn oil, apricot oil, castor  
25 oil, karite butter, avocado oil, olive oil, soybean oil, sweet almond oil, palm oil, rape seed oil, cotton oil, hazelnut oil, macadamia oil, jojoba oil, alfalfa

- oil, poppy oil, pumpkin oil, marrow oil, blackcurrant seed oil, evening primrose oil, millet oil, barley oil, quinoa oil, rye oil, safflower oil, candlenut oil, passion flower oil and musk rose oil; or alternatively
- 5 caprylic/capric acid triglycerides such as those sold by Stearineries Dubois or those sold under the names Miglyol 810, 812 and 818 by Dynamit Nobel;
- synthetic ethers containing from 10 to 40 carbon atoms;
- 10 - linear or branched hydrocarbons of mineral or synthetic origin, such as petroleum jelly, polydecenes, hydrogenated polyisobutene such as parleam, and squalane, and mixtures thereof;
- synthetic esters such as oils of formula  $R_1COOR_2$  in
- 15 which  $R_1$  represents a linear or branched fatty acid residue containing from 1 to 40 carbon atoms and  $R_2$  represents an in particular branched hydrocarbon-based chain containing from 1 to 40 carbon atoms, on condition that  $R_1 + R_2 \approx 10$ , such as, for example,
- 20 purcellin oil (cetostearyl octanoate), isopropyl myristate, isopropyl palmitate,  $C_{12}$ - $C_{15}$  alkyl benzoate, hexyl laurate, diisopropyl adipate, isononyl isononanoate, 2-ethylhexyl palmitate, isostearyl isostearate, alkyl or polyalkyl octanoates, decanoates
- 25 or ricinoleates such as propylene glycol dioctanoate; hydroxylated esters such as isostearyl lactate and diisostearyl malate; and pentaerythritol esters;

- fatty alcohols that are liquid at room temperature, containing a branched and/or unsaturated carbon-based chain containing from 12 to 26 carbon atoms, for instance octyldodecanol, isostearyl alcohol, oleyl alcohol, 2-hexyldecanol, 2-butyloctanol or 2-undecylpentadecanol;
  - higher fatty acids such as oleic acid, linoleic acid or linolenic acid; and mixtures thereof.
- 10 The non-volatile silicone oils which may be used in the composition according to the invention may be non-volatile polydimethylsiloxanes (PDMSS), polydimethylsiloxanes comprising alkyl or alkoxy groups, that are pendent and/or at the end of a
- 15 silicone chain, the groups each containing from 2 to 24 carbon atoms, phenylsilicones, for instance phenyltrimethicones, phenyldimethicones, phenyltrimethylsiloxydiphenylsiloxanes, diphenyldimethicones, diphenylmethyldiphenyltrisiloxanes and 2-phenylethyl
- 20 trimethylsiloxysilicates.

The fluoro oils which may be used in the invention are, in particular, fluorosilicone oils, fluoropolyethers or fluorosilicones, as described in document EP-A-847 752.

The non-volatile oils may be present in the composition according to the invention in a content ranging from 0%

to 80% (in particular from 0.1% to 80%) by weight, preferably from 0% to 50% by weight (in particular 0.1% to 50% by weight), relative to the total weight of the composition, and better still from 0% to 20% by weight  
5 (in particular 0.1% to 20%).

The fatty phase of the composition according to the invention can comprise a wax. For the purposes of the present invention, the term "wax" means a lipophilic  
10 fatty compound that is solid at room temperature (25°C) and atmospheric pressure (760 mmHg, i.e.  $10^5$  Pa), which undergoes a reversible solid/liquid change of state and which has a melting point of greater than 30°C and better still greater than 55°C, which may be up to  
15 200°C, in particular up to 120°C.

By taking the wax to its melting point, it is possible to make it miscible with oils and to form a microscopically homogeneous mixture, but on returning  
20 the temperature of the mixture to room temperature, recrystallization of the wax in the mixture of oils is obtained.

According to the invention, the melting point values  
25 correspond to the melting peak measured using a differential scanning calorimeter (DSC), for example the calorimeter sold under the name DSC 30 by the

company Mettler, with a temperature increase of 5 or 10°C per minute.

For the purposes of the invention, the waxes are those  
5 generally used in cosmetics and dermatology. Mention  
may be made in particular of beeswax, lanolin wax,  
Chinese insect waxes, rice wax, carnauba wax,  
candelilla wax, ouricury wax, sugar cane wax, Japan  
wax, sumach wax, montan wax, microcrystalline waxes,  
10 paraffin waxes, ozokerites, ceresin wax, lignite wax,  
polyethylene waxes and the waxes obtained by Fisher-  
Tropsch synthesis, and fatty acid esters of glycerides  
that are solid at 40°C and better still at more than  
55°C. Mention may also be made of the waxes obtained by  
15 catalytic hydrogenation of animal or plant oils  
containing linear or branched C<sub>8</sub>-C<sub>32</sub> fatty chains. Among  
these, mention may be made in particular of  
hydrogenated jojoba oil, hydrogenated sunflower oil,  
hydrogenated castor oil, hydrogenated coconut oil and  
20 hydrogenated lanolin oil.

Mention may also be made of silicone waxes or fluoro  
waxes.

The waxes present in the composition may be dispersed  
25 in the form of particles in an aqueous medium. These  
particles may have an average size ranging from 50 nm  
to 10 µm and preferably from 50 nm to 3.5 µm. In

particular, the wax may be present in the form of a wax-in-water emulsion, the waxes possibly being in the form of particles with an average size ranging from 1  $\mu\text{m}$  to 10  $\mu\text{m}$  and preferably from 1  $\mu\text{m}$  to 3.5  $\mu\text{m}$ .

5

In another embodiment of the composition according to the invention, the wax may be present in the form of a wax microdispersion, the wax being in the form of particles with an average size of less than 1  $\mu\text{m}$  and in particular ranging from 50 nm to 500 nm. Wax microdispersions are disclosed in documents EP-A-557 196 and EP-A-1 048 282.

The wax may also have a hardness ranging from 0.05 MPa to 15 MPa and preferably ranging from 6 MPa to 15 MPa.

15 The hardness is determined by measuring the compressive strength, measured at 20°C using a texturometer sold under the name TA-XT2i by the company Rheo, equipped with a stainless steel cylinder 2 mm in diameter travelling at a measuring speed of 0.1 mm/s, and

20 penetrating into the wax to a penetration depth of 0.3 mm. To carry out the hardness measurement, the wax is melted at a temperature equal to the melting point of the wax +20°C. The molten wax is cast in a container 30 mm in diameter and 20 mm deep. The wax is

25 recrystallized at room temperature (25°C) over 24 hours and is then stored for at least one hour at 20°C before carrying out the hardness measurement. The value of the

hardness is the compressive strength measured divided by the area of the texturometer cylinder in contact with the wax.

- 5 The wax may be present in the composition according to the invention in a content ranging from 0.1% to 50% by weight, relative to the total weight of the composition, preferably from 0.5% to 30% by weight and better still from 1% to 20% by weight.

10

The composition according to the invention may contain at least one fatty compound that is pasty at room temperature. For the purposes of the invention, the expression "pasty fatty substance" means fatty  
15 substances with a melting point ranging from 20 to 55°C, preferably 25 to 45°C, and/or a viscosity at 40°C ranging from 0.1 to 40 Pa.s (1 to 400 poises), preferably 0.5 to 25 Pa.s, measured using a Contraves TV or Rhéomat 80 viscometer, equipped with a spindle  
20 rotating at 60 Hz. A person skilled in the art can select the spindle for measuring the viscosity from the spindles MS-r3 and MS-r4, on the basis of his general knowledge, so as to be able to carry out the measurement of the pasty compound tested.

25

These fatty substances are preferably hydrocarbon-based compounds, optionally of polymeric type; they can also

be chosen from silicone compounds and/or fluoro compounds; they may also be in the form of a mixture of hydrocarbon-based compounds and/or silicone compounds and/or fluoro compounds. In the case of a mixture of  
5 different pasty fatty substances, the hydrocarbon-based pasty compounds (containing mainly hydrogen and carbon atoms and optionally ester groups) are preferably used in major proportion.

10 Among the pasty compounds which may be used in the composition according to the invention, mention may be made of lanolins and lanolin derivatives such as acetylated lanolins or oxypropylenated lanolins or isopropyl lanolate, having a viscosity of from 18 to  
15 21 Pa.s, preferably 19 to 20.5 Pa.s, and/or a melting point of from 30 to 55°C, and mixtures thereof. It is also possible to use esters of fatty acids or of fatty alcohols, in particular those containing from 20 to 65 carbon atoms (melting point of about from 20 to 35°C  
20 and/or viscosity at 40°C ranging from 0.1 to 40 Pa.s), such as triisostearyl or cetyl citrate; arachidyl propionate; polyvinyl laurate; cholesterol esters, such as triglycerides of plant origin, such as hydrogenated plant oils, viscous polyesters such as  
25 poly(12-hydroxystearic acid), and mixtures thereof. Triglycerides of plant origin which may be used are hydrogenated castor oil derivatives, such as "Thixinr"



from Rhéox.

Mention may also be made of pasty silicone fatty substances such as polydimethylsiloxanes (PDMSs) containing pendent chains of the alkyl or alkoxy type containing from 8 to 24 carbon atoms, and having a melting point of 20-55°C, such as stearyldimethicones, in particular those sold by Dow Corning under the trade names DC2503 and DC25514, and mixtures thereof.

10

The pasty fatty substance may be present in the composition according to the invention in a proportion of from 0% to 60% (in particular 0.01% to 60%) by weight, relative to the total weight of the composition, preferably in a proportion of from 0.5% to 45% by weight, and better still ranging from 2% to 30% by weight, in the composition.

The composition according to the invention may also comprise an aqueous medium, constituting an aqueous phase, which may be the continuous phase of the composition.

The aqueous phase may consist essentially of water; it may also comprise a mixture of water and of water-miscible solvent (miscibility in water of greater than 50% by weight at 25°C), for instance lower monoalcohols

containing from 1 to 5 carbon atoms such as ethanol or isopropanol, glycols containing from 2 to 8 carbon atoms, such as propylene glycol, ethylene glycol, 1,3-butylene glycol or dipropylene glycol, C<sub>3</sub>-C<sub>4</sub> ketones  
5 and C<sub>2</sub>-C<sub>4</sub> aldehydes.

The aqueous phase (water and optionally the water-miscible organic solvent) may be present in a content ranging from 1% to 95% by weight, relative to the total  
10 weight of the composition, preferably from 5% to 80% by weight and better still from 10% to 60% by weight.

The composition according to the invention can contain emulsifying surfactants, present in particular in a  
15 proportion ranging from 2% to 30% by weight relative to the total weight of the composition, and better still from 5% to 15%. These surfactants may be chosen from anionic and nonionic surfactants. Reference may be made to the document "Encyclopedia of Chemical Technology,  
20 Kirk-Othmer", volume 22, pp. 333-432, 3rd edition, 1979, Wiley, for the definition of the properties and functions (emulsifying) of surfactants, in particular pp. 347-377 of the said reference, for the anionic and nonionic surfactants.

25

The surfactants preferably used in the composition according to the invention are chosen from:

- nonionic surfactants: fatty acids, fatty alcohols, polyethoxylated or polyglycerolated fatty alcohols such as polyethoxylated stearyl or cetylstearyl alcohol, fatty acid esters of sucrose, alkylglucose esters, in particular polyoxyethylenated fatty esters of  $C_1$ - $C_6$  alkyl glucose, and mixtures thereof;
- anionic surfactants:  $C_{16}$ - $C_{30}$  fatty acids neutralized with amines, aqueous ammonia or alkaline salts, and mixtures thereof.

10.

Surfactants which make it possible to obtain an oil-in-water or wax-in-water emulsion are preferably used.

The composition according to the invention can comprise at least one additional second film-forming polymer, different from the first polymer described above.

The second film-forming polymer may be a polymer which is dissolved or dispersed in the form of particles in an aqueous phase of the composition, or dissolved or dispersed in the form of particles in a liquid fatty phase. The composition can comprise a mixture of these polymers.

The second film-forming polymer may be present in the composition according to the invention in a solids content ranging from 0.1% to 60% by weight relative to the total weight of the composition, preferably from

0.5% to 40% by weight and better still from 1% to 30% by weight.

In the present application, the expression "film-forming polymer" means a polymer which is capable, by itself or in the presence of an auxiliary film-forming agent, of forming a continuous and adherent film on a support, in particular on keratin materials.

10 A film-forming polymer capable of forming a hydrophobic film, i.e. a polymer whose film has a water-solubility at 25°C of less than 1% by weight, is preferably used.

Among the film-forming polymers which may be used in 15 the composition of the present invention, mention may be made of synthetic polymers, of radical-mediated type or of polycondensate type, and polymers of natural origin, and mixtures thereof.

20 The expression "radical-mediated film-forming polymer" means a polymer obtained by polymerization of monomers containing unsaturation, in particular ethylenic unsaturation, each monomer being capable of homopolymerizing (unlike polycondensates).

The film-forming polymers of radical-mediated type may be, in particular, vinyl polymers or copolymers, in particular acrylic polymers.

- 5 The vinyl film-forming polymers can result from the polymerization of monomers containing ethylenic unsaturation and containing at least one acidic group and/or esters of these acidic monomers and/or amides of these acidic monomers.

10

Monomers bearing an acidic group which may be used are  $\alpha,\beta$ -ethylenic unsaturated carboxylic acids such as acrylic acid, methacrylic acid, crotonic acid, maleic acid or itaconic acid. (Meth)acrylic acid and crotonic  
15 acid are preferably used, and more preferably (meth)acrylic acid.

The esters of acidic monomers are advantageously chosen from (meth)acrylic acid esters (also known as  
20 (meth)acrylates), especially (meth)acrylates of an alkyl, in particular of a  $C_1-C_{30}$  and preferably  $C_1-C_{20}$  alkyl, (meth)acrylates of an aryl, in particular of a  $C_6-C_{10}$  aryl, and (meth)acrylates of a hydroxyalkyl, in particular of a  $C_2-C_6$  hydroxyalkyl.

25

Among the alkyl (meth)acrylates which may be mentioned are methyl methacrylate, ethyl methacrylate, butyl

methacrylate, isobutyl methacrylate, 2-ethylhexyl methacrylate, lauryl methacrylate and cyclohexyl methacrylate.

5 Among the hydroxyalkyl (meth)acrylates which may be mentioned are hydroxyethyl acrylate, 2-hydroxypropyl acrylate, hydroxyethyl methacrylate and 2-hydroxypropyl methacrylate.

Among the aryl (meth)acrylates which may be mentioned  
10 are benzyl acrylate and phenyl acrylate.

The (meth)acrylic acid esters that are particularly preferred are the alkyl (meth)acrylates.

15 According to the present invention, the alkyl group of the esters may be either fluorinated or perfluorinated, i.e. some or all of the hydrogen atoms of the alkyl group are substituted with fluorine atoms.

20 As amides of the acidic monomers, mention may be made, for example, of (meth)acrylamides, and especially N-alkyl(meth)acrylamides, in particular of a C<sub>2</sub>-C<sub>12</sub> alkyl. Among the N-alkyl(meth)acrylamides which may be mentioned are N-ethylacrylamide,  
25 N-t-butylacrylamide, N-t-octylacrylamide and N-undecylacrylamide.

The vinyl film-forming polymers can also result from the homopolymerization or copolymerization of monomers chosen from vinyl esters and styrene monomers. In particular, these monomers may be polymerized with  
5 acidic monomers and/or esters thereof and/or amides thereof, such as those mentioned above.

Examples of vinyl esters which may be mentioned are vinyl acetate, vinyl neodecanoate, vinyl pivalate,  
10 vinyl benzoate and vinyl t-butylbenzoate.

Styrene monomers which may be mentioned are styrene and  $\alpha$ -methylstyrene.

15 It is possible to use any monomer known to those skilled in the art which falls within the categories of acrylic and vinyl monomers (including monomers modified with a silicone chain).

20 Among the film-forming polycondensates which may be mentioned are polyurethanes, polyesters, polyesteramides, polyamides, epoxy ester resins and polyureas.

25 The polyurethanes may be chosen from anionic, cationic, nonionic and amphoteric polyurethanes, polyurethane-acrylics, polyurethane-polyvinylpyrrolidones,

polyester-polyurethanes, polyether-polyurethanes, polyureas and polyurea-polyurethanes, and mixtures thereof.

- 5 The polyesters may be obtained, in a known manner, by polycondensation of dicarboxylic acids with polyols, in particular diols.

The dicarboxylic acid may be aliphatic, alicyclic or  
10 aromatic. Examples of such acids which may be mentioned are: oxalic acid, malonic acid, dimethylmalonic acid, succinic acid, glutaric acid, adipic acid, pimelic acid, 2,2-dimethylglutaric acid, azelaic acid, suberic acid, sebacic acid, fumaric acid, maleic acid, itaconic  
15 acid, phthalic acid, dodecanedioic acid, 1,3-cyclohexanedicarboxylic acid, 1,4-cyclohexanedicarboxylic acid, isophthalic acid, terephthalic acid, 2,5-norboranedicarboxylic acid, diglycolic acid, thiodipropionic acid,  
20 2,5-naphthalenedicarboxylic acid and 2,6-naphthalenedicarboxylic acid. These dicarboxylic acid monomers may be used alone or in combination with at least two dicarboxylic acid monomers. Among these monomers, the ones preferably chosen are phthalic acid,  
25 isophthalic acid and terephthalic acid.



The diol may be chosen from aliphatic, alicyclic and aromatic diols. The diol preferably used is one chosen from: ethylene glycol, diethylene glycol, triethylene glycol, 1,3-propanediol, cyclohexanedimethanol, 5 4-butanediol. Other polyols which may be used are glycerol, pentaerythritol, sorbitol and trimethylolpropane.

The polyesteramides may be obtained in a manner 10 analogous to that of the polyesters, by polycondensation of diacids with diamines or amino alcohols. Diamines which may be used are ethylenediamine, hexamethylenediamine and meta- or para-phenylenediamine. An amino alcohol which may be 15 used is monoethanolamine.

The polyester may also comprise at least one monomer bearing at least one group  $-SO_3M$ , with M representing a hydrogen atom, an ammonium ion  $NH_4^+$  or a metal ion such 20 as, for example, an  $Na^+$ ,  $Li^+$ ,  $K^+$ ,  $Mg^{2+}$ ,  $Ca^{2+}$ ,  $Cu^{2+}$ ,  $Fe^{2+}$  or  $Fe^{3+}$  ion. A difunctional aromatic monomer comprising such a group  $-SO_3M$  may be used in particular.

The aromatic nucleus of the difunctional aromatic monomer also bearing a group  $-SO_3M$  as described above 25 may be chosen, for example, from benzene, naphthalene, anthracene, biphenyl, oxybiphenyl, sulphonylbiphenyl and methylenebiphenyl nuclei. As examples of

difunctional aromatic monomers also bearing a group -SO<sub>3</sub>M, mention may be made of: sulphisophthalic acid, sulphoterephthalic acid, sulphophthalic acid, 4-sulphonaphthalene-2,7-dicarboxylic acid.

5

The copolymers preferably used are those based on isophthalate/sulphisophthalate, and more particularly copolymers obtained by condensation of diethylene glycol, cyclohexanedimethanol, isophthalic acid and  
10 sulphisophthalic acid. Such polymers are sold, for example, under the brand name Eastman AQ® by the company Eastman Chemical Products.

The polymers of natural origin, optionally modified,  
15 may be chosen from shellac resin, sandarac gum, dammar resins, elemi gums, copal resins and cellulose polymers, and mixtures thereof.

According to a first embodiment of the composition  
20 according to the invention, the second film-forming polymer may be present in the form of particles in aqueous dispersion, which is generally known as a latex or pseudolatex. The techniques for preparing these dispersions are well known to those skilled in the art.

25

Aqueous dispersions of film-forming polymers which may be used are the acrylic dispersions sold under the

names Neocryl XK-90°, Neocryl A-1070°, Neocryl A-1090°,  
Neocryl BT-62°, Neocryl A-1079° and Neocryl A-523° by  
the company Avecia-Neoresins, Dow Latex 432° by the  
company Dow Chemical, Daitosol 5000 AD° by the company  
5 Daito Kasey Kogyo; or the aqueous dispersions of  
polyurethane sold under the names Neorez R-981° and  
Neorez R-974° by the company Avecia-Neoresins,  
Avalure UR-405°, Avalure UR-410°, Avalure UR-425°,  
Avalure UR-450°, Sancure 875°, Sancure 861°, Sancure 878°  
10 and Sancure 2060° by the company Goodrich, Impranil 85°  
by the company Bayer and Aquamere H-1511° by the company  
Hydromer.

Aqueous dispersions of film-forming polymers which may  
15 also be used are the polymer dispersions resulting from  
the radical-mediated polymerization of one or more  
radical-mediated monomers within and/or partially at  
the surface of pre-existing particles of at least one  
polymer chosen from the group consisting of  
20 polyurethanes, polyureas, polyesters, polyesteramides  
and/or alkyds. These polymers are generally referred to  
as hybrid polymers.

According to a second embodiment of the composition  
according to the invention, the film-forming polymer  
25 may be a water-soluble polymer and is thus present in  
the aqueous phase of the composition in dissolved form.

Examples of water-soluble film-forming polymers which may be mentioned are:

- proteins, for instance proteins of plant origin such as wheat proteins and soybean proteins; proteins of  
5 animal origin such as keratins, for example keratin hydrolysates and sulphonic keratins;
- anionic, cationic, amphoteric or nonionic chitin or chitosan polymers;
- polymers of celluloses such as hydroxyethylcellulose,  
10 hydroxypropylcellulose, methylcellulose, ethylhydroxyethylcellulose and carboxymethylcellulose, and quaternized cellulose derivatives;
- acrylic polymers or copolymers, such as polyacrylates or polymethacrylates;
- 15 - vinyl polymers, for instance polyvinylpyrrolidones, copolymers of methyl vinyl ether and of malic anhydride, the copolymer of vinyl acetate and of crotonic acid, copolymers of vinylpyrrolidone and of vinyl acetate; copolymers of vinylpyrrolidone and of  
20 caprolactam; polyvinyl alcohol;
- polymers of natural origin, which are optionally modified, such as:
  - gum arabics, guar gum, xanthan derivatives, karaya gum;
- 25 - alginates and carrageenans;
- glycoaminoglycans, hyaluronic acid and derivatives thereof;

- shellac resin, sandarac gum, dammar resins, elemi gums and copal resins;
- deoxyribonucleic acid;
- mucopolysaccharides such as hyaluronic acid and
- 5 chondroitin sulphate, and mixtures thereof.

According to another embodiment of the composition according to the invention, the film-forming polymer may be present in a liquid fatty phase comprising

10 organic solvents or oils such as those described above. For the purposes of the invention, the expression "liquid fatty phase" means a fatty phase which is liquid at room temperature (25°C) and atmospheric pressure (760 mmHg, i.e.  $10^5$  Pa), composed of one or

15 more fatty substances that are liquid at room temperature, also known as oils, which are generally mutually compatible.

The liquid fatty phase preferably comprises a volatile

20 oil, optionally mixed with a non-volatile oil, the oils possibly being chosen from those mentioned above.

According to a third embodiment of the composition according to the invention, the film-forming polymer

25 may be present in the form of surface-stabilized particles dispersed in the liquid fatty phase.

The dispersion of surface-stabilized polymer particles may be manufactured as disclosed in document EP-A-749 747.

- 5 The polymer particles are surface-stabilized by means of a stabilizer which may be a block polymer, a grafted polymer and/or a random polymer, alone or as a mixture.

Dispersions of film-forming polymer in the liquid fatty  
10 phase, in the presence of stabilizers, are disclosed in particular in documents EP-A-0 749 746, EP-A-0 923 928 and EP-A-0 930 060, the content of which is incorporated in the present patent application by reference.

15

The size of the polymer particles dispersed either in the aqueous phase or in the liquid fatty phase can range from 5 nm to 600 nm and preferably from 20 nm to 300 nm.

20

According to a fourth embodiment of the composition according to the invention, the film-forming polymer may be dissolved in the liquid fatty phase, in which case the film-forming polymer is said to be a  
25 liposoluble polymer.

Examples of liposoluble polymers which may be mentioned are copolymers of vinyl ester (the vinyl group being

directly linked to the oxygen atom of the ester group and the vinyl ester containing a saturated, linear or branched hydrocarbon-based radical of 1 to 19 carbon atoms, linked to the carbonyl of the ester group) and  
5 of at least one other monomer which may be a vinyl ester (other than the vinyl ester already present), an  $\alpha$ -olefin (containing from 8 to 28 carbon atoms), an alkyl vinyl ether (in which the alkyl group comprises from 2 to 18 carbon atoms) or an allylic or methallylic  
10 ester (containing a saturated, linear or branched hydrocarbon-based radical of 1 to 19 carbon atoms, linked to the carbonyl of the ester group).

These copolymers may be crosslinked with the aid of  
15 crosslinking agents, the aim of which is to [lacuna] which may be either of the vinyl type or of the allylic or methallylic type, such as tetraallyloxyethane, divinylbenzene, divinyl octanedioate, divinyl dodecanedioate and divinyl octadecanedioate.

20

Examples of these copolymers which may be mentioned are the following copolymers: vinyl acetate/allyl stearate, vinyl acetate/vinyl laurate, vinyl acetate/vinyl stearate, vinyl acetate/octadecene, vinyl  
25 acetate/octadecyl vinyl ether, vinyl propionate/allyl laurate, vinyl propionate/vinyl laurate, vinyl stearate/1-octadecene, vinyl acetate/1-dodecene, vinyl

stearate/ethyl vinyl ether, vinyl propionate/cetyl  
vinyl ether, vinyl stearate/allyl acetate, vinyl  
2,2-dimethyloctanoate/vinyl laurate, allyl  
2,2-dimethylpentanoate/vinyl laurate, vinyl  
5 dimethylpropionate/vinyl stearate, allyl  
dimethylpropionate/vinyl stearate, vinyl propionate/  
vinyl stearate, crosslinked with 0.2% divinylbenzene,  
vinyl dimethylpropionate/vinyl laurate, crosslinked  
with 0.2% divinylbenzene, vinyl acetate/octadecyl vinyl  
10 ether, crosslinked with 0.2% tetaallyloxyethane, vinyl  
acetate/allyl stearate, crosslinked with 0.2%  
divinylbenzene, vinyl acetate/1-octadecene, crosslinked  
with 0.2% divinylbenzene, and allyl propionate/allyl  
stearate, crosslinked with 0.2% divinylbenzene.

15

Examples of liposoluble film-forming polymers which may  
also be mentioned are liposoluble homopolymers, and in  
particular those resulting from the homopolymerization  
of vinyl esters containing from 9 to 22 carbon atoms or  
20 of alkyl acrylates or methacrylates, and alkyl radicals  
containing from 10 to 20 carbon atoms.

Such liposoluble homopolymers may be chosen from  
polyvinyl stearate, polyvinyl stearate crosslinked with  
25 divinylbenzene, with diallyl ether or with diallyl  
phthalate, polystearyl (meth)acrylate, polyvinyl  
laurate and polylauryl (meth)acrylate, it being



possible for these poly(meth)acrylates to be crosslinked with the aid of ethylene glycol dimethacrylate or tetraethylene glycol dimethacrylate.

5 The liposoluble copolymers and homopolymers defined above are known and are described in particular in patent application FR-A-2 232 303; they may have a weight-average molecular weight ranging from 2 000 to 500 000 and preferably from 4 000 to 200 000.

10

As liposoluble film-forming polymers which may be used in the invention, mention may also be made of polyalkylenes and in particular copolymers of  $C_2$ - $C_{20}$  alkenes, such as polybutene, alkylcelluloses with  
15 a linear or branched, saturated or unsaturated  $C_1$ - $C_8$  alkyl radical, for instance ethylcellulose and propylcellulose, copolymers of vinylpyrrolidone (VP) and in particular copolymers of vinylpyrrolidone and of  $C_2$  to  $C_{40}$  and better still  $C_3$  to  $C_{20}$  alkene. As examples  
20 of VP copolymers which may be used in the invention, mention may be made of the copolymers of VP/vinyl acetate, VP/ethyl methacrylate, butylated polyvinylpyrrolidone (PVP), VP/ethyl methacrylate/methacrylic acid, VP/eicosene, VP/hexadecene,  
25 VP/triacontene, VP/styrene or VP/acrylic acid/lauryl methacrylate.

The composition according to the invention may comprise an auxiliary film-forming agent for promoting the formation of a film with the film-forming polymer. Such a film-forming agent may be chosen from any compound  
5 known to those skilled in the art as being capable of fulfilling the desired function, and may be chosen in particular from plasticizers and coalescers.

The composition according to the invention may also  
10 comprise a dyestuff, for instance pulverulent dyestuffs, liposoluble dyes and water-soluble dyes. This dyestuff may be present in a content ranging from 0.01% to 50% by weight, relative to the total weight of the composition, preferably ranging from 0.01% to 30%  
15 by weight.

The pulverulent dyestuffs may be chosen from pigments and nacles.

20 The pigments may be white or coloured, mineral and/or organic, and coated or uncoated. Among the mineral pigments which may be mentioned are titanium dioxide, optionally surface-treated, zirconium oxide, zinc oxide or cerium oxide, as well as iron oxide, chromium oxide,  
25 manganese violet, ultramarine blue, chromium hydrate and ferric blue. Among the organic pigments which may be mentioned are carbon black, pigments of D & C type,

and lakes based on cochineal carmine or on barium, strontium, calcium or aluminium.

The nacres may be chosen from white nacreous pigments  
5 such as mica coated with titanium or with bismuth  
oxychloride, coloured nacreous pigments such as  
titanium mica with iron oxides, titanium mica with, in  
particular, ferric blue or chromium oxide, titanium  
mica with an organic pigment of the abovementioned  
10 type, and nacreous pigments based on bismuth  
oxychloride.

The liposoluble dyes are, for example, Sudan Red, D&C  
Red 17, D&C Green 6,  $\beta$ -carotene, soybean oil, Sudan  
15 Brown, D&C Yellow 11, D&C Violet 2, D&C Orange 5,  
quinoline yellow and annatto. The water-soluble dyes  
are, for example, beetroot juice and methylene blue.

The composition of the invention may also comprise any  
20 additive usually used in cosmetics, such as  
antioxidants, fillers, preserving agents, fragrances,  
neutralizing agents, thickeners, cosmetic or  
dermatological active agents such as, for example,  
emollients, moisturizers, vitamins and sunscreens, and  
25 mixtures thereof. These additives may be present in the  
composition in a content ranging from 0% to 20% (in  
particular from 0.01% to 20%) relative to the total

weight of the composition and better still from 0.01% to 10% (if present).

Needless to say, a person skilled in the art will take  
5 care to select the optional additional additives and/or the amount thereof such that the advantageous properties of the composition according to the invention are not, or are not substantially, adversely affected by the addition envisaged.

10

The composition according to the invention may be manufactured by the known processes generally used in cosmetics or dermatology.

The invention is illustrated in greater  
15 detail in the examples which follow.

Example 1:

A mascara having the composition below was prepared:

20	- Carnauba wax	2.6 g
	- Beeswax	3.3 g
	- Paraffin wax	10.4 g
	- Hydrogenated jojoba oil	0.2 g
	- Hydrogenated palm oil	0.2 g
25	- Polyamide resin with ester end groups, sold under the name "Uniclear® 100" by the company Arizona Chemical	1 g

	- 2-Amino-2-methyl-1,3-propanediol	0.8 g
	- Triethanolamine	2.4 g
	- Stearic acid	6.6 g
	- Hydroxyethylcellulose	0.8 g
5	- Gum arabic	0.6 g
	- Ethyl acrylate/methyl methacrylate copolymer (80/20) as an aqueous dispersion containing 50% AM (Daitosol 5000 AD from Saito)	5 g AM
10	- Polyamide fibres (3 mm long and 0.9 Dtex, from the company Paul Bonte)	1 g
	- Black iron oxide	5 g
	- Preserving agents	qs
	- Water	qs 100 g

15

This mascara is easy to apply and adheres well to the eyelashes during and after application; the eyelashes are made up quickly.

The make-up result obtained gives the eyelashes a

20 lengthened effect.

Example 2:

A mascara having the composition below was prepared:

	- Carnauba wax	2.6 g
25	- Beeswax	3.3 g
	- Paraffin wax	10.4 g
	- Hydrogenated jojoba oil	0.2 g

- Hydrogenated palm oil 0.2 g
- Polyamide resin sold under the name  
"Uni-Rez<sup>®</sup> 126" by the company  
Arizona Chemical 1 g
- 5 - 2-Amino-2-methyl-1,3-propanediol 0.8 g
- Triethanolamine 2.4 g
- Stearic acid 6.6 g
- Hydroxyethylcellulose 0.8 g
- Gum arabic 0.6 g
- 10 - Ethyl acrylate/methyl methacrylate  
copolymer (80/20) as an aqueous  
dispersion containing 50% AM  
(Daitosol 5000 AD from Saito) 5 g AM
- Polyamide fibres (3 mm long and 0.9 Dtex,  
15 from the company Paul Bonte) 1 g
- Black iron oxide 5 g
- Preserving agents qs
- Water qs 100 g
- 20 This mascara adheres well to the eyelashes during  
application and allows the eyelashes to be made up  
quickly.

## CLAIMS

1. Composition comprising, in a physiologically acceptable medium containing a fatty phase, at least  
5 one first polymer with a weight-average molecular mass of less than 100 000, comprising a) a polymer skeleton containing hydrocarbon-based repeating units containing at least one hetero atom, and optionally b) at least one pendent fatty chain and/or at least one terminal  
10 fatty chain, which may be functionalized, containing from 6 to 120 carbon atoms and being linked to these hydrocarbon-based units, and at least one or more fibres.
- 15 2. Composition according to Claim 1, characterized in that the average molar mass of the first polymer is less than 100 000, preferably less than 50 000.
3. Composition according to Claim 1 or 2,  
20 characterized in that the units containing a hetero atom of the first polymer comprise a nitrogen atom.
4. Composition according to one of the preceding claims, characterized in that the units containing a  
25 hetero atom of the first polymer are amide groups.

5. Composition according to one of the preceding claims, characterized in that the fatty chains represent from 40% to 98% and better still from 50% to 95% of the total number of units containing a hetero  
5 atom and of fatty chains.

6. Composition according to one of the preceding claims, characterized in that the pendent fatty chains are linked directly to at least one of the said hetero  
10 atoms.

7. Composition comprising, in a physiologically acceptable medium comprising a fatty phase, at least one first polyamide polymer with a weight-average  
15 molecular mass of less than 100 000, comprising a) a polymer skeleton containing amide repeating units, and b) optionally at least one pendent fatty chain and/or at least one terminal fatty chain, which may be functionalized, containing from 6 to 120 carbon atoms  
20 and being linked to these amide units, and one or more fibres.

8. Composition according to the preceding claim, characterized in that the fatty chains represent from  
25 40% to 98% of the total number of amide units and of fatty chains.



9. Composition according to Claim 7 or 8, characterized in that the fatty chains represent from 50% to 95% of the total number of amide units and of fatty chains.

5

10. Composition according to one of Claims 7 to 10, characterized in that the pendent fatty chains are linked directly to at least one of the nitrogen atoms of the amide units.

10

11. Composition according to one of the preceding claims, characterized in that the average molar mass of the first polymer ranges from 1 000 to 100 000, preferably from 1 000 to 50 000 and better still from

15 1 000 to 30 000.

12. Composition according to one of the preceding claims, characterized in that the weight-average molar mass of the first film-forming polymer ranges from

20 2 000 to 20 000 and preferably from 2 000 to 10 000.


13. Composition according to one of the preceding claims, characterized in that the terminal fatty chain(s) is (are) linked to the skeleton via bonding

25 groups.

14. Composition according to Claim 13, characterized in that the bonding groups are ester groups.

15. Composition according to one of the preceding claims, characterized in that the fatty chain(s)  
5 contain(s) from 12 to 68 carbon atoms.

16. Composition according to one of the preceding claims, characterized in that the first polymer is chosen from polymers of formula (I) below, and mixtures  
10 thereof:

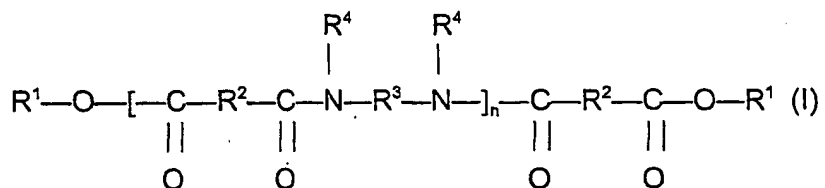

15 in which n denotes a number of amide units such that the number of ester groups represents from 10% to 50% of the total number of ester and amide groups; R<sup>1</sup> is, independently in each case, an alkyl or alkenyl group  
20 containing at least 4 carbon atoms; R<sup>2</sup> represents, independently in each case, a C<sub>4</sub> to C<sub>42</sub> hydrocarbon-based group, on condition that 50% of the groups R<sup>2</sup> represent a C<sub>30</sub> to C<sub>42</sub> hydrocarbon-based group; R<sup>3</sup> represents, independently in each case, an organic  
25 group containing at least 2 carbon atoms, hydrogen atoms and optionally one or more oxygen or nitrogen atoms; and R<sup>4</sup> represents, independently in each case, a hydrogen atom, a C<sub>1</sub> to C<sub>10</sub> alkyl group or a direct bond to R<sup>3</sup> or to another R<sup>4</sup>, such that the nitrogen atom to

which  $R^3$  and  $R^4$  are both attached forms part of a heterocyclic structure defined by  $R^4-N-R^3$ , with at least 50% of the groups  $R^4$  representing a hydrogen atom.

5 17. Composition according to the preceding claim, characterized in that  $R^1$  is a  $C_{12}$  to  $C_{22}$  alkyl group.

18. Composition according to either of Claims 15 and 16, characterized in that  $R^2$  are groups containing from  
10 30 to 42 carbon atoms.

19. Composition according to one of the preceding claims, characterized in that the first polymer is present in a content ranging from 0.01% to 10% by  
15 weight, relative to the total weight of the composition, preferably ranging from 0.05% to 5% by weight and better still ranging from 0.1% to 3% by weight.

20 20. Composition according to one of the preceding claims, characterized in that the fibre(s) is(are) chosen from silk, cotton, wool or flax fibres, cellulose fibres extracted in particular from wood, plants or algae, polyamide, cork, sugar cane, rayon or  
25 viscose fibres, acetate fibres, in particular rayon acetate, cellulose acetate or silk acetate fibres, poly-(p-phenyleneterephthalamide) fibres, acrylic

polymer fibres, in particular polymethyl methacrylate or poly-2-hydroxyethyl methacrylate fibres, polyolefin fibres and in particular polyethylene or polypropylene fibres, glass, silica or carbon fibres, in particular  
5 in graphite form, polytetrafluoroethylene, insoluble collagen, polyester, polyvinyl chloride or polyvinylidene chloride, polyvinyl alcohol, polyacrylonitrile, chitosan, polyurethane or polyethylene phthalate fibres, fibres formed from  
10 mixtures of polymers, and surgical fibres, and mixtures thereof.

21. Composition according to any one of the preceding claims, characterized in that the fibres are fibres of  
15 synthetic origin.

22. Composition according to one of the preceding claims, characterized in that the fibre(s) contain(s) a chemical group of the same chemical nature as that of  
20 the units of the structuring polymer or a group capable of forming physical bonds of the same type as that of the units of the polymer.

23. Composition according to one of the preceding  
25 claims, characterized in that the fibre is hydrophobic-treated.

24 Composition according to any one of the preceding claims, characterized in that the fibres are polyamide fibres or poly-(p-phenyleneterephthamide) fibres.

25. Composition according to any one of the preceding  
5 claims, characterized in that the fibres have a length L and a diameter D such that L/D is chosen in the range from 1.5 to 2 500, preferably from 3.5 to 500 and better still from 5 to 150.

10 26. Composition according to any one of the preceding claims, characterized in that the fibres have a length ranging from 1 nm to 20 mm, preferably from 10 nm to 5 mm and more preferably from 0.1 mm to 1.6 mm.

15 27. Composition according to one of the preceding claims, characterized in that the fibre is present in a content ranging from 0.1% to 40% by weight, relative to the total weight of the composition, preferably from 1% to 30% by weight and better still from 5% to 20% by  
20 weight.

28. Composition according to any one of the preceding claims, characterized in that it contains at least one wax.

25

29. Composition according to any one of the preceding claims, characterized in that it contains at least one

wax having a melting point of greater than 30°C, which may be up to 120°C.

30. Composition according to any one of the preceding  
5 claims, characterized in that it contains a wax chosen from the group formed by beeswax, lanolin wax, Chinese insect waxes, rice wax, carnauba wax, candelilla wax, ouricury wax, cork fibre wax, sugar cane wax, Japan wax, sumach wax, montan wax, microcrystalline waxes,  
10 paraffin waxes, ozokerites, ceresin wax, lignite wax, polyethylene waxes and the waxes obtained by Fisher-Tropsch synthesis, fatty acid esters of glycerides that are solid at 40°C, the waxes obtained by catalytic hydrogenation of animal or plant oils containing linear  
15 or branched C<sub>8</sub>-C<sub>32</sub> fatty chains, silicone waxes and fluoro waxes, and mixtures thereof.

31. Composition according to any one of the preceding claims, characterized in that it comprises a wax having  
20 a hardness ranging from 0.05 MPa to 15 MPa.

32. Composition according to any one of Claims 28 to 31, characterized in that the wax is dispersed in an aqueous medium in the form of particles with an average  
25 size ranging from 50 nm to 10 µm and preferably ranging from 50 nm to 3.5 µm.

33. Composition according to any one of Claims 28 to 32, characterized in that the wax is present in a content ranging from 0.1% to 50% by weight, relative to the total weight of the composition, preferably from 5 0.5% to 30% by weight and better still from 1% to 20% by weight.

34. Composition according to any one of the preceding claims, characterized in that it contains a volatile 10 oil or organic solvent.

35. Composition according to Claim 34, characterized in that the volatile oil is chosen from hydrocarbon-based volatile oils containing from 8 to 16 carbon 15 atoms.

36. Composition according to Claim 34 or 35, characterized in that the volatile oil is present in a content ranging from 0.1% to 98% by weight, relative to 20 the total weight of the composition, and preferably ranging from 1% to 65% by weight.

37. Composition according to one of the preceding claims, characterized in that it comprises a non- 25 volatile oil.

38. Composition according to one of the preceding claims, characterized in that it also contains at least one non-volatile oil chosen from hydrocarbon-based oils of mineral, plant or synthetic origin, synthetic esters  
5 or ethers and silicone oils, and mixtures thereof.

39. Composition according to one of the preceding claims, characterized in that the fatty phase is present in a content ranging from 2% to 98% by weight, relative to the total weight of the composition,  
10 preferably ranging from 5% to 85% by weight.

40. Composition according to any one of the preceding claims, characterized in that it comprises an aqueous phase.  
15

41. Composition according to any one of the preceding claims, characterized in that it comprises a second film-forming polymer which is different from the first polymer.  
20

42. Composition according to Claim 41, characterized in that the second film-forming polymer is chosen from the group formed by vinyl polymers, polyurethanes, polyesters, polyamides, polyureas and cellulose  
25 polymers.



43. Composition according to Claim 41 or 42, characterized in that the second film-forming polymer is dissolved in an aqueous phase or is in the form of particles in aqueous dispersion.

5

44. Composition according to any one of Claims 40 to 42, characterized in that the second film-forming polymer is dissolved or dispersed in the form of surface-stabilized particles in a liquid fatty phase.

10

45. Composition according to any one of Claims 40 to 44, characterized in that the second film-forming polymer is present in a content ranging from 0.1% to 60% by weight, relative to the total weight of the composition, preferably from 0.5% to 40% by weight and better still from 1% to 30% by weight.

46. Composition according to one of the preceding claims, characterized in that it also contains at least one dyestuff.

47. Composition according to Claim 46, characterized in that the dyestuff is chosen from pigments, nacles, liposoluble dyes and water-soluble dyes, and mixtures thereof.

48. Composition according to Claim 46 or 47, characterized in that the dyestuff is present in a proportion of from 0.01% to 50% relative to the total weight of the composition, preferably ranging from  
5 0.01% to 30% by weight.

49. Composition according to one of the preceding claims, characterized in that it constitutes a care composition or make-up composition for keratin  
10 materials.

50. Composition according to one of the preceding claims, characterized in that it contains at least one additive chosen from water, antioxidants, fillers,  
15 preserving agents, fragrances, neutralizing agents, thickeners and cosmetic or dermatological active agents, and mixtures thereof.

51. Composition according to one of the preceding  
20 claims, characterized in that it is in the form of a mascara, an eyeliner, a product for the eyebrows, a product for the lips, a face powder, an eyeshadow, a foundation, a make-up product for the body, a concealer product, a nail varnish, a skincare product or a  
25 haircare product.

52. Mascara comprising a composition according to any one of Claims 1 to 50.

53. Cosmetic process for making up or caring for the  
5 keratin materials of human beings, comprising the application of a cosmetic composition in accordance with one of Claims 1 to 51 to the keratin materials.

54. Use of a composition according to any one of  
10 Claims 1 to 51 to obtain a deposit which adheres to keratin materials.

55. Use of a mascara according to Claim 52 to thicken and/or lengthen the eyelashes.

15

56. Use of a combination of at least one first polymer with a weight-average molecular mass of less than 100 000 and better still less than 50 000, comprising  
a) a polymer skeleton containing hydrocarbon-based  
20 repeating units containing at least one hetero atom, and b) optionally at least one pendent fatty chain and/or at least one terminal fatty chain, which may be functionalized, containing from 6 to 120 carbon atoms and being linked to these hydrocarbon-based units, and  
25 at least one fibre, in a physiologically acceptable composition, to obtain a deposit which adheres to keratin materials.

57. Use according to Claim 56, characterized in that the fibre(s) contain(s) a chemical group of the same chemical nature as those of the units of the first polymer or a group capable of forming physical bonds of the same type as that of the units of the first polymer.

58. Use according to Claim 56 or 57, characterized in that the first polymer is a polyamide comprising end groups containing an ester group comprising a hydrocarbon-based chain containing from 10 to 42 carbon atoms.

59. Use according to one of Claims 56 to 58, characterized in that the fibre is chosen from polyester fibres, polyamide fibres or poly-(p-phenylene terephthalamide) fibres.

60. Use according to one of Claims 56 to 59, characterized in that the first polymer has a weight-average molecular mass ranging from 1 000 to 30 000.

61. Use according to any one of Claims 56 to 60, characterized in that the composition comprises a second film-forming polymer which is different from the first polymer.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
20 June 2002 (20.06.2002)

PCT

(10) International Publication Number  
WO 02/047619 A3

- (51) International Patent Classification<sup>7</sup>: A61K 7/00, 7/02
- (21) International Application Number: PCT/IB01/02786
- (22) International Filing Date:  
11 December 2001 (11.12.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
00/16161 12 December 2000 (12.12.2000) FR  
PCT/IB/00/02002  
21 December 2000 (21.12.2000) IB
- (71) Applicant (*for all designated States except US*):  
L'OREAL S.A. [FR/FR]; 14, Royale Street, F-75008  
Paris (FR).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): COLLIN, Nathalie  
[FR/FR]; 1, Michel Voisin Street, F-92330 Sceaux (FR).
- (74) Agent: KROMER, Christophe; L'Oréal - D.P.I., 6,  
Bertrand Sincholle Street, F-92585 Clichy Cedex (FR).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,  
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,  
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,  
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,  
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,  
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,  
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent  
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,  
NE, SN, TD, TG).
- Published:  
— with international search report
- (88) Date of publication of the international search report:  
20 March 2003
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

WO 02/047619 A3

(54) Title: COSMETIC COMPOSITION COMPRISING A POLYMER AND FIBRES

(57) Abstract: The invention relates to a composition comprising, in a physiologically acceptable medium containing a fatty phase, a polymer with a weight-average molecular mass of less than 100 000 and in particular ranging from 1000 to 30 000, comprising a) a polymer skeleton containing hydrocarbon-based repeating units containing at least one hetero atom, and optionally b) pendent fatty chains and/or terminal fatty chains, which may be functionalized, containing from 6 to 120 carbon atoms and being linked to these units, and fibres.

## INTERNATIONAL SEARCH REPORT

national Application No  
PCT/IB 01/02786

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 A61K7/00 A61K7/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 A61K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

CHEM ABS Data, WPI Data, EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 053 742 A (L'OREAL) 22 November 2000 (2000-11-22) claim 1; example 2 ---	1
P,X	EP 1 066 814 A (L'OREAL) 10 January 2001 (2001-01-10) the whole document ---	1
X	DATABASE CHEMICAL ABSTRACTS 'Online! STN; access number 90: 76 419, XP002175531 abstract & JP 53 043577 A (POLA CHEMICAL IND. CO., LTD) 21 May 1975 (1975-05-21) --- -/--	1

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*S\* document member of the same patent family

Date of the actual completion of the international search

10 September 2002

Date of mailing of the international search report

02/10/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Glikman, J-F

## INTERNATIONAL SEARCH REPORT

national Application No  
PCT/IB 01/02786

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DATABASE CHEMICAL ABSTRACTS 'Online! STN; access number: 124: 37403, XP002175532 abstract & JP 07 267827 A (SHISEIDO CO LTD) 17 October 1995 (1995-10-17) ----	1
X	FR 1 529 329 A (MAX FACTOR & CO.) 14 June 1968 (1968-06-14) the whole document ----	1
X	DATABASE CHEMICAL ABSTRACTS 'Online! retrieved from STN Database accession no. 96: 109968 XP002213014 abstract & JP 56 123909 A (ISEHAN K.K.) 29 September 1981 (1981-09-29) -----	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 01/02786

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1053742	A	22-11-2000	FR 2793683 A1 BR 0001804 A CA 2309774 A1 CN 1284321 A EP 1053742 A1 JP 2000344627 A	24-11-2000 06-02-2001 20-11-2000 21-02-2001 22-11-2000 12-12-2000
EP 1066814	A	10-01-2001	FR 2795950 A1 EP 1066814 A1 WO 0103653 A1 JP 2001048750 A	12-01-2001 10-01-2001 18-01-2001 20-02-2001
JP 53043577	A	19-04-1978	JP 1172222 C JP 58004777 B	17-10-1983 27-01-1983
JP 07267827	A	17-10-1995	NONE	
FR 1529329	A	14-06-1968	NONE	
JP 56123909	A	29-09-1981	NONE	



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**